



Barloop Chains

Barloop Chains consist of a standard forged rivetless inside block, fabricated steel sidebars, and cold drawn steel pins.

Barloop Chain offers the advantage of a flat sidebar for welding attachments. The pin is securely locked in the sidebars

eliminating both the wear between the pin and sidebar and the possibility of the chain coming apart when slack exists.

Union offers Barloop Chain with a nut and bolt assembly that rotates. This permits easy assembly and quick replacement.

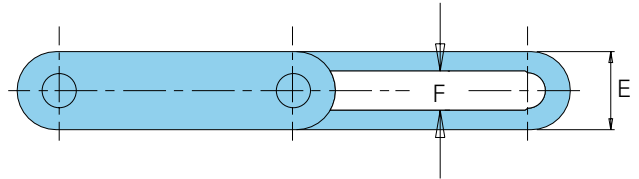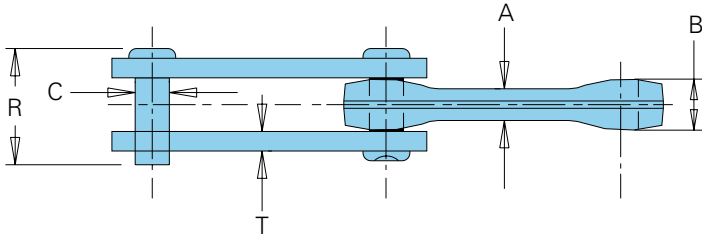

Barloop (Bar Link) Chains

All dimensions are in inches unless otherwise indicated.

Chain Number	Pitch	Dimensions							Average Ultimate Stgth.(lbs.)	Average Pitches per Foot	Approx. Weight (lbs./ft.)
		A	B	C	E	F	T	R			
S-348 ¹	3.015	.50	.75	.50	1.06	.53	.25	1.75	24,000	3.95	2.4
S-458	4.031	.63	1.02	.63	1.38	.69	.31	2.06	48,000	2.98	3.5
S-678	6.031	.81	1.31	.88	2.00	1.00	.50	3.00	85,000	1.99	8.6
S-698	6.031	1.00	1.56	1.13	2.69	1.25	.50	3.13	130,000	1.33	13.2
S-998	9.031	1.00	1.56	1.13	2.69	1.25	.50	3.13	130,000	1.33	10.4

■ Indicates this chain is normally stocked. All others are made-to-order.

¹Standard chain inventory features nut and bolt construction.

To locate compatible sprockets for your chain, refer to the Product Cross-Reference in Section D.

Note: Dimensions are subject to change. Contact Union Chain to obtain certified prints for design and construction.