

Bottling Industry

The Union Chain Division of U.S. Tsubaki, Inc., keeps the beverages flowing at breweries, soft drink bottlers, and juice manufacturers throughout the world. We make chain that is used in bottlewashers, pasteurizers, and sterilizers. There are hundreds of specifications and configurations that can be used in these applications, depending on the type and capacity of equipment, size of bottles, and many other factors. We have a wide range of chains available, or we can make a chain to your exact specifications.




Factors to Consider

Bottlewasher/Pasteurizer Chains are used to convey large quantities of bottles at a slow speed through the washer or pasteurizer. Chains are generally matched and tagged to hold bottle racks in exact position between chains without skewing. Chain and attachment tolerances are very important. Usually the chains are constructed of carbon steel for increased economy. Since the environment is wet, stainless steel or plated parts can be used to improve corrosion resistance. Chains can be almost any pitch size; however, they are


commonly in the 4" to 6" range. Attachments are usually mid-pitch holes or A styles, but may be made to fit your units.

Sterilizers use two strands of chain. Bottles are sterilized by steam, which creates a wet, high-temperature environment ($\geq 200^{\circ}\text{F}$). That means chains must be constructed from temperature- and corrosion-resistant materials, such as stainless steel. Sterilizer chains frequently have a 4" to 6" pitch.


40001, 60001, 60002

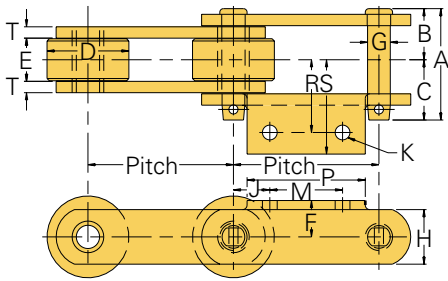


40002

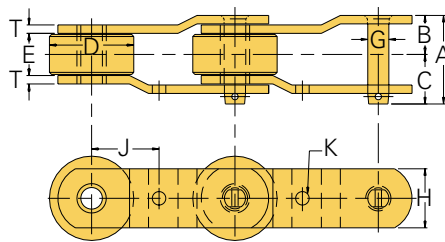


40003, 42501

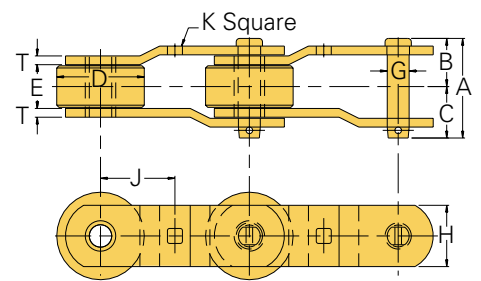

50001, 52502

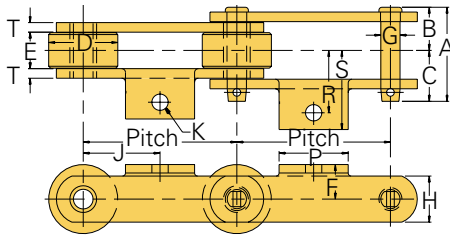

52501

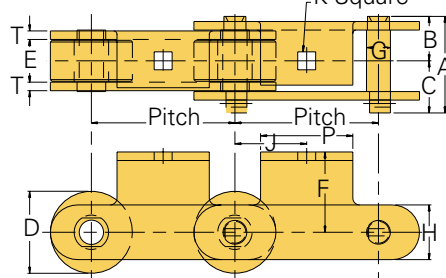

Bottle Washing, Pasteurizing and Sterilizing Chains

All dimensions are in inches unless otherwise indicated.

Chain No.	Pitch	Width				Roller Dia.	Pin Dia.	Pin Hgt.	Sidebar Thk.	Attachment	Bearing Area (in. ²)	Average Ultimate Stgth. (lbs.)	Max. Work Load (lbs.)	Approx. Weight (lbs./ft.)						
		Overall	Pin Head to CL	Pin End to CL	Inside															
		A	B	C	E	D	G	H	T	F	P	J	M	R	S	K				
40001	4.000	2.91	1.31	1.60	1.25	2.00	.56	1.50	.25	1.00	3.25	1.00	2.00	2.00	2.59	.38	.97	27,000	3,440	7.4
40002	4.000	2.63	1.12	1.51	.94	2.50	.56	1.50	.31			2.00				.38	.69	50,000	3,075	7.8
40003	4.000	3.09	1.50	1.59	1.25	2.50	.56	1.50	.31			2.00				.43	1.03	31,000	3,995	10.6
42501	4.250	2.84	1.37	1.47	1.25	2.50	.56	1.75	.25			2.13				.43	1.03	31,000	3,825	8.9
50001	5.000	3.06	1.39	1.67	1.19	2.25	.63	1.50	.31	1.13	2.25	2.50		1.69	2.31	.50	1.01	43,000	3,995	8.0
52501	5.250	3.53	1.62	1.91	1.56	3.00	.88	2.00	.31	2.94	3.38	2.63				.66	1.89	47,000	6,890	15.2
52502	5.250	3.41	1.56	1.85	1.44	2.75	.63	1.50	.31	3.06	2.25	2.63		2.00	2.80	.53	1.26	37,000	4,645	11.0
60001	6.000	3.06	1.39	1.67	1.19	2.50	.63	1.50	.31	1.25	3.25	1.94	2.13	2.08	2.69	.38	1.01	46,000	3,995	8.3
60002	6.000	3.06	1.39	1.67	1.19	3.00	.63	1.50	.31	1.25	3.25	1.94	2.13	2.08	2.69	.38	1.01	46,000	3,995	9.7

Make In-Line Inspections Easy

Put machinery access at your fingertips. ONE-TOUCH INSPECTION DOOR® is a dust- and rain-tight inspection and service door for conveyors, as well as processing and handling equipment. These pre-fabricated units are in-stock and ready-to-go for easy installation at the job site. Once in place, ONE-TOUCH INSPECTION DOOR allows for quick and simple inspection without the need for special tools: just lift the lever! No bolts to loosen and no covers to misplace. One touch is all it takes...it's that simple. For more information, see the ONE-TOUCH INSPECTION DOOR description in Section C.

THE UNION SOLUTION

- **Manufactured to tight tolerances**
- **Strong, long-lasting chain**
- **Corrosion resistant**
- **High durability**
- **Reliable in-plant service**

To locate compatible sprockets for your chain, refer to the Product Cross-Reference in Section D.

Note: Dimensions are subject to change. Contact Union Chain to obtain certified prints for design and construction.

ONE-TOUCH INSPECTION DOOR® is a registered trademark of Tsubaki Conveyor of America, Inc.