

U.S. TSUBAKI STANDARD ATTACHMENT CHAIN

BS/DIN Chain Series


(ISO 606)

Dimensions: inch


U.S. TSUBAKI Chain No.	ISO "B" Number	Pitch P	Roller Diameter R	Width Between Roller Link Plates W	Pin			Offset Pin L
					D	L ₁	L ₂	
RS08B	08B	.500	.335	0.305	0.175	0.328	0.395	0.724
RS10B	10B	.625	.400	0.379	0.200	0.370	0.448	0.830
RS12B	12B	.750	.475	0.459	0.225	0.433	0.519	0.976
RS16B	16B	1.000	.625	0.670	0.325	0.704	0.783	1.531

Dimensions: inch


U.S. TSUBAKI Chain No.	Link Plate				ISO "B" Tensile Strength lbs.	Minimum Tensile Strength lbs.	Approx. Weight lbs./ft.	Number of Pitches per Unit
	h	H	t	T				
RS08B	0.429	0.464	0.060	0.060	4,000	4,000	0.50	240
RS10B	0.539	0.578	0.060	0.060	5,000	5,000	0.68	192
RS12B	0.633	0.633	0.070	0.070	6,500	6,500	0.90	160
RS16B	0.826	0.826	0.125	0.156	7,500	14,300	1.90	120




K-1 Attachment

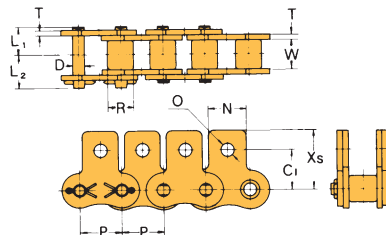


SK-1 Attachment




D-3 Attachment



A-1 Attachment

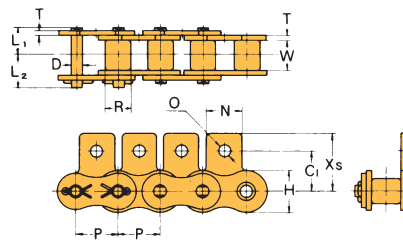

SA-1 Attachment




D-1 Attachment

Dimensions: inch


U.S. TSUBAKI Chain No.	C	C ₁	N	O	S	X	X _s	D	L ₃	L ₄
RS08B	0.468	0.500	0.448	0.165	0.350	0.750	0.759	0.175	0.374	0.667
RS10B	0.625	0.625	0.500	0.196	0.401	0.875	0.901	0.200	0.468	0.799
RS12B	0.750	0.874	0.649	0.279	0.531	1.175	1.271	0.225	0.562	0.956
RS16B	0.937	0.937	0.948	0.263	0.598	1.470	1.358	0.325	0.751	1.389

BS/DIN Chain Series


(ISO 606)




WA-1, WA-2 Attachment



WSA-1, WSA-2 Attachment



WK-1, WK-2 Attachment



WSK-1, WSK-2 Attachment

Dimensions: inch

U.S. TSUBAKI Chain No.	C	C ₁	O	S	X	X _s	N _w	K _w
RS08B	0.500	0.515	0.192	0.350	0.799	0.814	0.968	0.500
RS10B	0.625	0.653	0.196	0.401	0.899	0.929	1.181	0.625
RS12B	0.687	0.692	0.216	0.448	1.009	1.015	1.370	0.751
RS16B	1.125	1.023	0.318	0.625	1.545	1.444	1.811	1.000