



Double Pitch Chain with Large Plastic Rollers

This chain with plastic (polyacetal resin) rollers offers smooth, quiet operation and long wear life. It is available from our factory on a made to order basis. Stainless steel chain with plastic rollers is also available for those applications where corrosion resistance is required.

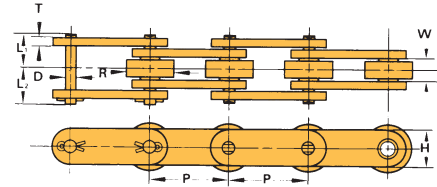

U.S. TSUBAKI Chain No.	Pitch P	Roller Dia. R	Width Between Roller Link Plates		Pin				Link Plate		Average Tensile Strength lbs.	Maximum Allowable Load lbs.	Maximum Allowable Roller Load lbs./roller	Approx. Weight lbs./ft.	Number of Links per 10 ft.
			D	W	L ₁	L ₂	RIV.	L ₁ +L ₂ COT.	Thickness T	Height H					
C2042D	1.00	.625	.312	.156	.325	.392	.650	.717	.060	.472	3,700	100	44	0.33	120
C2052D	1.25	.750	.375	.200	.406	.472	.812	.878	.080	.591	6,100	154	66	0.57	96
C2062HD	1.50	.875	.500	.234	.573	.652	1.146	1.225	.125	.677	9,000	231	110	0.98	80
C2082HD	2.00	1.125	.625	.312	.720	.823	1.440	1.543	.156	.906	15,400	397	200	1.77	60
C2102HD	2.50	1.562	.750	.375	.830	.980	1.660	1.810	.187	1.150	24,000	573	286	2.44	48
C2042SSD	1.00	.625	.312	.156	.325	.392	.650	.717	.060	.472	2,600	100	44	0.33	120
C2052SSD	1.25	.750	.375	.200	.406	.472	.812	.878	.080	.591	4,400	154	66	0.57	96
C2062HSSD	1.50	.875	.500	.234	.573	.652	1.146	1.225	.125	.677	6,200	231	110	0.98	80
C2082HSSD	2.00	1.125	.625	.312	.720	.823	1.440	1.543	.156	.906	11,400	397	200	1.77	60
C2102HSSD	2.50	1.562	.750	.375	.858	.965	1.716	1.823	.187	1.126	13,200	573	286	2.52	48

■ Attachments

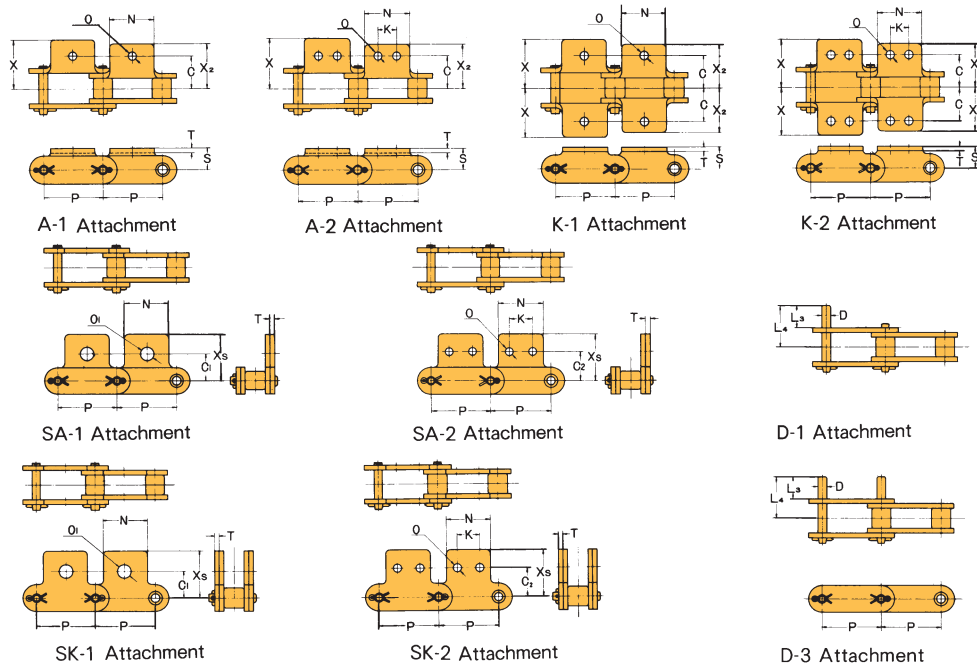

U.S. TSUBAKI Base Chain No.	Pitch P															Additional Weight Per Att. (lbs.)			
		C	C ₁	C ₂	K	N	O	O ₁	S	T	X	X ₂	X _s	D	L ₃	L ₄	A, SA Att.	K, SK Att.	D Att.
C2042D	1.00	.500	.437	.535	.374	.752	.142	.205	.358	.060	.760	.693	.780	.156	.374	.663	.0066	.0132	.0022
C2052D	1.25	.626	.563	.626	.469	.937	.205	.268	.437	.080	.953	.866	.969	.200	.469	.827	.0132	.0264	.0044
C2062HD	1.50	.844	.689	.752	.563	1.126	.205	.343	.579	.125	1.240	1.110	1.205	.234	.563	1.081	.0374	.0748	.0066
C2082HD	2.00	1.094	.874	1.000	.752	1.500	.268	.406	.752	.156	1.602	1.441	1.594	.312	.752	1.398	.0704	.1408	.0154
C2102HD	2.50	1.312	1.125	1.250	.938	1.875	.323	.516	.922	.187	1.950	1.650	1.984	.375	.937	1.687	.1320	.2640	.0264

Note: 1. Spring clip type connecting links will be provided for C2042D ~ C2062HD. 2. Attachments are also available for stainless steel chain.