

U.S. TSUBAKI STOCK SPROCKETS


Steel Split Sprockets

Steel Split Hub

Dimensions are in inches unless otherwise indicated.

Hub Number	Bore	Hub O.D.	Hub Length	Bolts	Wt. Lbs.
S-1B	3/4 — 1 1/2	3 1/8	1	3/8 x 2 1/4	1.80
S-2B	1 3/8 — 2 1/4	4 3/8	1 1/4	1/2 x 3	4.00
S-3B	2 — 3	6	1 3/8	5/8 x 4 1/2	8.40
S-4B	2 3/4 — 4	7 5/8	1 1/2	3/4 x 5 1/2	14.40
S-5B	3 3/4 — 5	9 1/4	2	1 x 6	27.70
S-6B	4 3/4 — 6	10 1/4	2 1/4	1 x 6 1/2	35.40

NOTE: Length through bore can be determined by adding plate thickness to hub length. (All dimensions in inches.)

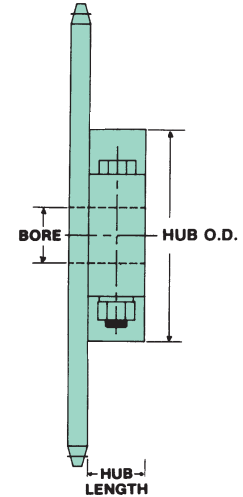

Sprocket Size for Instant Hubs

Dimensions are in inches unless otherwise indicated.

Hub Number	Bore	Minimum Number of Teeth										
		Chain Number										
		40	50	60	80	100	120	140	160	180	200	240
S-1B	3/4 — 1 1/2	28	23	20	16	—	—	—	—	—	—	—
S-2B	1 3/8 — 2 1/4	38	30	26	20	17	15	14	—	—	—	—
S-3B	2 — 3	46	37	32	25	20	18	16	15	14	—	—
S-4B	2 3/4 — 4		48	40	30	25	21	19	17	16	15	12
S-5B	3 3/4 — 5					30	25	22	20	18	17	14
S-6B	4 3/4 — 6					32	27	24	22	19	18	15