


Hollow Pin Chain

RS TYPE

Standard attachments are available for U.S. Tsubaki Hollow Pin chain in both single and double pitch types. Cross rods may be inserted into any link without disassembling the chain.

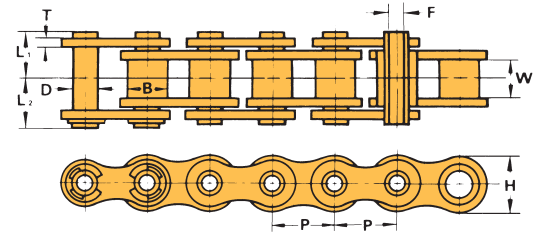


RS Type (Single pitch type)




U.S. TSUBAKI Chain No.	Pitch P	Width Between Inner Link Plates W	Bushing Diameter B	Pin				Link Plate		Average Tensile Strength lbs.	Maximum Allowable Load lbs.	Approx. Weight lbs./ft.
				D	F	L ₁	L ₂	T	H			
RS40HP	.500	.312	.312	.224	.157	.315	.374	.060	.472	2,430	397	.36
RS50HP	.625	.375	.400	.284	.202	.396	.459	.080	.591	4,410	705	.58
RS60HP	.750	.500	.469	.330	.236	.494	.561	.094	.713	5,950	948	.85
RS80HP	1.000	.625	.625	.448	.316	.640	.701	.125	.949	10,800	1,720	1.60

DOUBLE PITCH TYPE

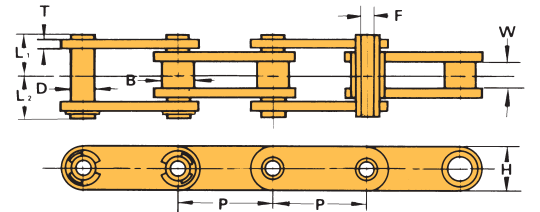

Double Pitch Type – Standard rollerless type

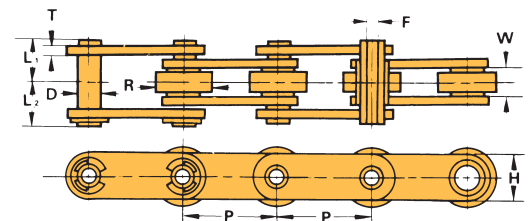

Double Pitch Type – Oversize roller type

U.S. TSUBAKI Chain No.	Pitch P	Width Between Inner Link Plates W	Bushing Diameter B	Roller Diameter R	Pin				Link Plate		Average Tensile Strength lbs.	Maximum Allowable Load lbs.	Approx. Weight lbs./ft.
					D	F	L ₁	L ₂	T	H			
DOUBLE PITCH TYPE - STANDARD ROLLER													
C2040HP	1.000	.312	.312	—	.224	.157	.315	.374	.060	.472	2,430	397	.31
C2050HP	1.250	.375	.400	—	.284	.202	.396	.459	.080	.591	4,410	705	.50
C2060HP	1.500	.500	.469	—	.330	.236	.494	.561	.094	.677	5,950	948	.93
C2080HP	2.000	.625	.625	—	.448	.316	.640	.701	.125	.906	10,800	1,720	1.21
DOUBLE PITCH TYPE - OVERSIZE ROLLER													
C2042HP	1.000	.312	—	.625	.224	.157	.315	.374	.060	.472	2,430	397	.55
C2052HP	1.250	.375	—	.750	.284	.202	.396	.459	.080	.591	4,410	705	.81
C2062HP	1.500	.500	—	.875	.330	.236	.494	.561	.094	.677	5,950	948	1.38
C2082HP	2.000	.625	—	1.125	.448	.316	.640	.701	.125	.906	10,800	1,720	1.89